

LoRaWAN ambient air monitor

(CO₂, temperature, humidity, barometric pressure)



Features

- State-of-the-art non-dispersive infrared (NDIR) technology to measure CO₂.
- Integrated industry standard humidity and temperature sensor.
- Integrated high accuracy barometric pressure sensor.
- Place and measure: no setup required; just switch it on.
- Unattended real-time monitoring for several years without replacing batteries.
- Compatible with LoRaWAN™ networks of any provider.
- Robust polycarbonate enclosure: weatherproof, impact-, UV-resistant.
- Standard alkaline (C-type) batteries: available everywhere.
- CE compliant, Radio Equipment Directive (RED) 2014/53/EU.

Applications

- General indoor and outdoor air quality monitoring.
- Global environmental surveillance: ground and atmospheric CO₂ sensing.
- Ventilation control: for good indoor air quality and energy savings.
- Process yield and economic efficiency: e.g. in greenhouses, mushroom farming, food packaging, transportation/storage, chicken hatcheries and incubators.
- Personal safety: in confined spaces where combustion is present or gas leakage could occur such as garages, tunnels, public bars, restaurants or burners.
- Automotive: refrigerant leakage control and HVAC fresh air supply demand sensing.



Decentlab GmbH
Ueberlandstrasse 129 – 8600 Duebendorf – Switzerland
Tel. +41 44 809 3595 – mail@decentlab.com – www.decentlab.com

Description

Decentlab's ambient air monitor continuously measures carbon dioxide (CO₂) concentration, temperature, humidity and barometric pressure. Barometric pressure and temperature data are used by the CO₂ sensor to compensate for temperature and pressure variations and the elevation above sea level. Sensor data are transmitted in real-time using LoRaWAN™ radio technology. LoRaWAN™ enables encrypted radio transmissions over long distances while consuming very little power. The user can obtain sensor data through Decentlab's data storage and visualization system, or through the user's own infrastructure. Visit <http://www.decentlab.com/> for more information about Decentlab's data cloud service.

Device specifications

Device logging function

Sampling interval	1 min
Data upload interval	10 min
Reported sensor data (average of 10 measurements)	CO ₂ concentration (filtered / unfiltered) CO ₂ sensor raw values (filtered / unfiltered) CO ₂ sensor temperature CO ₂ sensor status information Air humidity and temperature Barometric pressure and temperature Battery voltage

Integrated CO₂ sensor specifications (as specified by sensor manufacturer)

Operating principle	Non-dispersive infrared (NDIR)
Measurement range	0 – 2000 ppm
Accuracy	±50 ppm or ±3 % of reading ¹
RMS noise	25 ppm @ 1000 ppm

Integrated humidity / temperature sensor (as specified by sensor manufacturer)

Operating principle	Digital CMOSens® technology
Measurement range	0 – 100 % RH, –40 to +125 °C
Accuracy (typical)	±2 % RH, ±0.3 °C

Integrated barometric pressure sensor (as specified by sensor manufacturer)

Operating principle	Piezo-resistive absolute pressure sensor
Operation range	300 – 1100 hPa, –40 to +85 °C
Accuracy (typical)	±1 hPa

¹ Condition: 10 – 40 °C, 20 – 60 % RH

Radio / wireless

Wireless technology	LoRaWAN™
Wireless security	AES-128 data encryption
LoRaWAN device type	Class A end-device
Supported LoRaWAN features	OTAA, ABP, ADR, adaptive channel setup
Wireless range	> 10 km ² (line of sight), approx. 2 km (suburban)
RF transmit power	14 dBm (25 mW)
Receiver sensitivity	−146 dBm ³
Frequency bands	868 MHz (EU version), 915 MHz (US version) ⁴
Antenna	Integrated antenna

Power supply

Internal battery type	2 × alkaline C batteries (R14)
Power consumption	≤ 0.9 mW
Battery lifetime	3 years (conservative estimation) 6 years (position close to LoRaWAN gateway)

Operating conditions

Temperature	−10 to 50 °C
Humidity	0 – 95 % RH (non-condensing)

Mechanical specifications

Dimensions	122 × 81 × 67 mm
Weight	376 g including batteries (246 g without batteries)
Enclosure	Polycarbonate (weatherproof, impact-, UV-resistant). Air inlet on the bottom: protected by shroud and a fine-meshed stainless grid.

Operating instructions

The product usually requires no user interaction. If you open the enclosure, e.g. in order to replace the batteries, unscrew the four plastic screws and carefully open the lid.

CAUTION: Make sure the sensor unit does not drop out of the enclosure while opening! Do not touch the electronic components and sensors! Particularly the CO₂ sensor is very sensitive to mechanical stress.

² Decentlab reports successful transmissions over 56 km distance

³ Specified by radio chip vendor

⁴ Contact us for region specific options

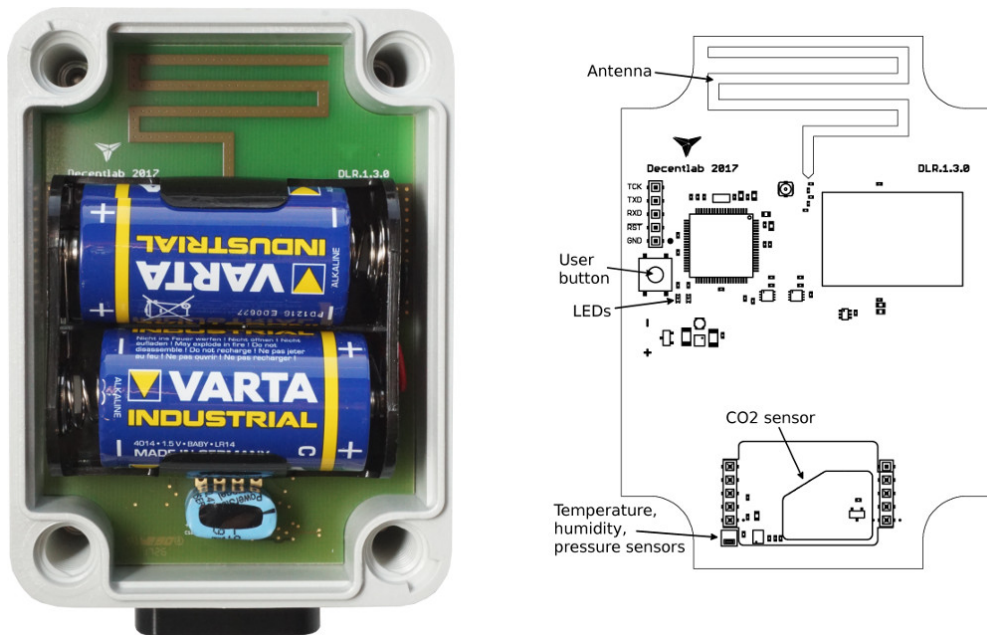


Illustration 1: Sensor unit inside enclosure with batteries inserted (left); component side of the sensor unit (right).

Replacing batteries

The device operates until the battery voltage drops to about 2 V. Always replace both battery cells with two identical fresh batteries. Use only high-quality alkaline C batteries (R14).

Operating modes

The device has three operating modes:

- Reset: System (re-)start; both LEDs light up for a short time.
- Active mode: Periodic measurements and data transmissions; green LED flashes for each measurement.
- Test mode: Measurements and data transmissions at fastest possible rates; blue LED is on. CAUTION: use only momentarily, e.g. for testing the wireless connection.
- Sleep mode: No measurements and data transmissions (power save mode).

User button and LEDs

The user button allows to switch between the operating modes as shown in Illustration 2. To perform a device reset, switch to sleep mode first (if necessary) by pushing the button for 3 seconds (until LEDs flash three times); wait 3 seconds; then push the button for 3 seconds (until LEDs light up). To switch between active and test mode, push the button for 1 second (blue LED on / off). If the blue LED is off, the device is in active or sleep mode. If the blue LED is on, the device is in test mode. To check whether the device is active or in sleep mode, push the button twice for 1 second; if the blue LED goes on and off, the device is in active mode; otherwise, the device is in sleep mode.

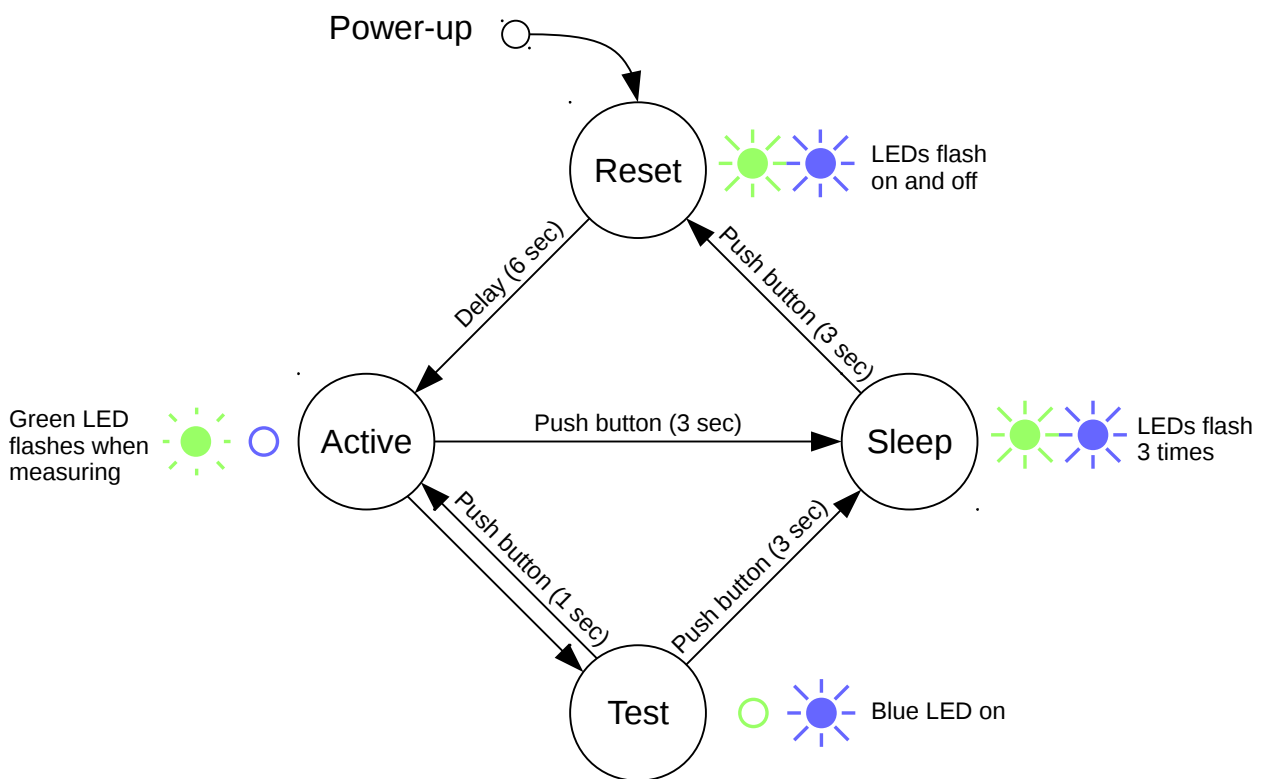


Illustration 2: Device operating mode state diagram.

Mounting instructions

Mount the device in upright position, the air inlet facing downward. Prefer a mounting location which is protected against rain and direct sun radiation in order to achieve best sensor data quality.

For best radio performance, position the device in such a way that the device lid faces roughly in the direction of the next gateway. Avoid metallic objects close to the device.

The housing includes 4 threaded bushes (M4) in a 90 × 60 mm rectangle (see Illustration 3). This enables easy installation using standard M4 bolts.

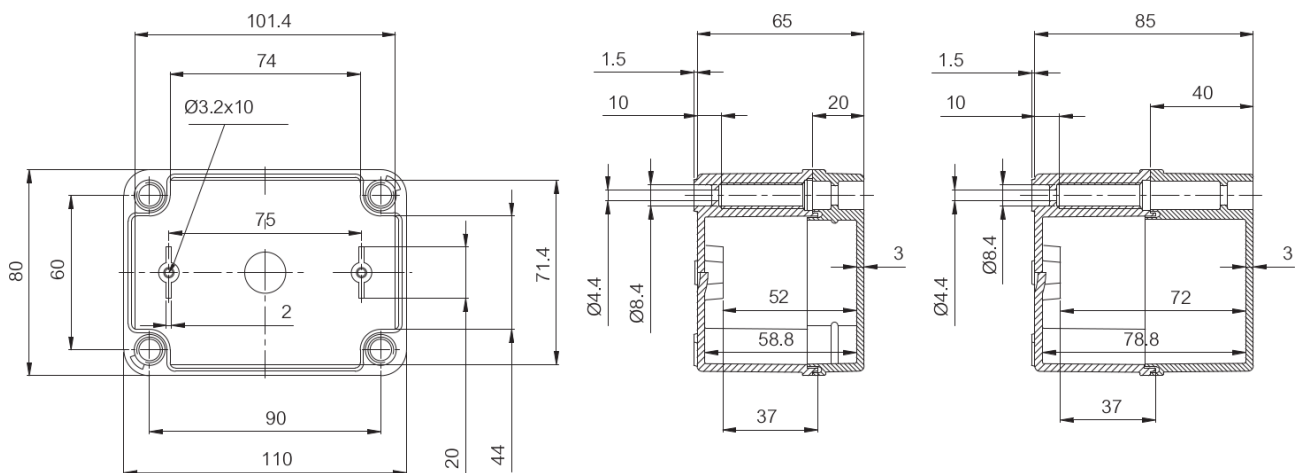


Illustration 3: Housing dimensions. Note: Drawing not including air inlet. Dimensions in mm.

Ordering information

Device model references

DL-LP8P-EU868	EU version
DL-LP8P-US915	US version
	Other options: contact us

Sensor data message format

Message:	Header	Sensor 0 data (optional)	Sensor 1 data (opt.)	...	Sensor 15 data (opt.)
-----------------	--------	--------------------------	----------------------	-----	-----------------------

- Message length is variable, depending on which sensor data are included. Minimum length is 5 bytes (header only). Maximum length is 5 bytes + all sensor data (see below).
- Integers are big endian: MSB first byte, LSB last byte.

Header:	Version	Device ID	Flags
----------------	---------	-----------	-------

- Version: 1 byte; version = 2 for current protocol version.
- Device ID: 2 bytes; 0...65535.
- Flags: 16 bits: flag 15 | flag 14 | ... | flag 0 (LSB).
- The flags indicate, if data of the respective sensors are included in the message or not:
Flag n == 1: sensor n data included; flag n == 0: not included.

Details

Field	Parameter name	Type	Conversion	Unit
Header	Version	uint8		
Header	Device ID	uint16		
Header	Flags	uint16		
Sensor 0	Air temperature	uint16	$x / 65536 \cdot 175.72 - 46.85$	°C
Sensor 0	Air humidity	uint16	$x / 65536 \cdot 125 - 6$	%
Sensor 1	Barometer temperature	uint16	$(x - 5000) / 100$	°C
Sensor 1	Barometric pressure	uint16	$x \cdot 2$	Pa
Sensor 2	CO ₂ concentration	uint16	$x - 32768$	ppm
Sensor 2	CO ₂ concentration (low-pass filtered)	uint16	$x - 32768$	ppm
Sensor 2	CO ₂ sensor temperature	uint16	$(x - 32768) / 100$	°C
Sensor 2	Capacitor voltage 1	uint16	$x / 1000$	V
Sensor 2	Capacitor voltage 2	uint16	$x / 1000$	V
Sensor 2	CO ₂ sensor status	uint16	x	
Sensor 2	Raw IR reading	uint16	x	
Sensor 2	Raw IR reading (low-pass filtered)	uint16	x	
Sensor 3	Battery voltage	uint16	$x / 1000$	V

Example 1 (all sensor data included)

Message (hex):

020578000f67bd618d1cedbd1081d981f4895b0bd80bb50000959895390c25

02	Version	=	2	
0578	Device ID	=	1400	
000f	Flags	=	0b00000000000001111	
67bd	Air temperature	=	24.36	deg
618d	Air humidity	=	41.63	%
1ced	Barometer temperature	=	24.05	deg
bd10	Barometric pressure	=	96800	Pa
81d9	CO2 concentration	=	473	ppm
81f4	CO2 concentration (LPF)	=	500	ppm
895b	CO2 sensor temperature	=	23.95	deg
0bd8	Capacitor voltage 1	=	3.032	V
0bb5	Capacitor voltage 2	=	2.997	V
0000	CO2 sensor status	=	0	
9598	Raw IR reading	=	38296	
9539	Raw IR reading (LPF)	=	38201	
0c25	Battery voltage	=	3.109	V

Example 2 (CO₂ sensor data not included)

Message (hex):

020578000b67bd618d1cedbd100c25

02	Version	=	2	
0578	Device ID	=	1400	
000b	Flags	=	0b00000000000001011	
67bd	Air temperature	=	24.36	deg
618d	Air humidity	=	41.63	%
1ced	Barometer temperature	=	24.05	deg
bd10	Barometric pressure	=	96800	Pa
----	CO2 concentration	=	----	ppm
----	CO2 concentration (LPF)	=	----	ppm
----	CO2 sensor temperature	=	----	deg
----	Capacitor voltage 1	=	----	V
----	Capacitor voltage 2	=	----	V
----	CO2 sensor status	=	----	
----	Raw IR reading	=	----	
----	Raw IR reading (LPF)	=	----	
0c25	Battery voltage	=	3.109	V

Example 3 (only battery voltage)

Message (hex):

02057800080c25

02	Version	=		2	
0578	Device ID	=		1400	
0008	Flags	=	0b000000000000001000		
----	Air temperature	=		----	deg
----	Air humidity	=		----	%
----	Barometer temperature	=		----	deg
----	Barometric pressure	=		----	Pa
----	CO2 concentration	=		----	ppm
----	CO2 concentration (LPF)	=		----	ppm
----	CO2 sensor temperature	=		----	deg
----	Capacitor voltage 1	=		----	V
----	Capacitor voltage 2	=		----	V
----	CO2 sensor status	=		----	
----	Raw IR reading	=		----	
----	Raw IR reading (LPF)	=		----	
0c25	Battery voltage	=		3.109	V

Declaration of conformity

We,

Decentlab GmbH
Ueberlandstrasse 129
8600 Duebendorf
Switzerland,



declare under our own responsibility that the product

Reference	Name
DL-LP8P-EU868	LoRaWAN ambient air monitor

to which this declaration refers conforms with the relevant standards or other standards documents

- EN 300 220-1 V3.1.1: 2017-02
- EN 300 220-2 V3.1.1: 2017-02
- EN 301 489-1 V2.2.0: 2017-03
- EN 301 489-3 V2.1.1: 2017-03

According to

- Radio Equipment Directive (RED) 2014/53/EU
- Electromagnetic Compatibility (EMC) Directive 2014/30/EU

Duebendorf, 27. July 2018

Reinhard Bischoff, Managing Director

A handwritten signature in black ink, appearing to read 'R. Bischoff', written in a cursive style.