

Point Dendrometer ZN11-T-WP

The **ZN11-T-WP** is the further developed version of the former ZB06. The frame is made out of one piece of carbon fibre (CFK) and is consequently combined with stainless steel elements (rods and nuts). The electronic displacement-sensor (linear motion potentiometer) is the same as for the ZB06.

Size of carbon fibre frame: 190 x 92 x 8 mm


Weight (without thread rods): < 100 g

Frame: T-shaped carbon fibre frame, 3 stainless steel thread rods, 6 screw nuts, 6 washers, and 3 cap nuts.

Displacement transducer: Weatherproof but not sealed potentiometer for measuring in a μm resolution. Hub of the moving rod is 2 cm.

Power supply: 5V DC.

Output: 0-5V DC, single ended measurement.

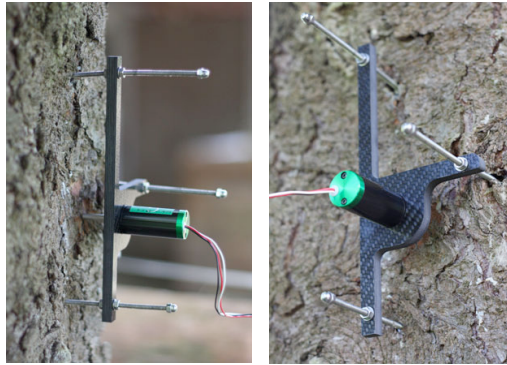

Voltage-Sensitivity: 1 mV = 4.0 μm

Temperature-Sensitivity: < -0.28 $\mu\text{m } ^\circ\text{C}^{-1}$

What is detected?

Diurnal stem radius fluctuations are mainly influenced by changes of the thickness of living tissues of the bark (mainly phloem cells). The thickness changes depend on the hydration status of the bark. While water is withdrawn from the bark through transpiration during the daytime, at night the tissue is replenished. As a result of this cycle, the diameter decreases during the day and increases at night. Over a period of weeks and months, this diurnal rhythm is altered by growth. New layers of xylem cells irreversibly increase the radius, particularly during wet periods in the growing season. An additional but smaller contribution comes from tensions within the wood and the growth and death of the phloem cells. In winter, ice formations in the wood induce strong decreases of the stem radius.

Advantages in comparison to other products

- No disturbances by deformations of the dead outermost layer of the bark, induced by temperature and air-humidity (a general argument in favour of point dendrometers and against band dendrometers).

- Materials and electronic parts insensitive to temperature allow for more accurate measurements.
- The spot of measurement is not influenced by the thread rods because it is neither in the vertical nor in the horizontal line of the anchor points.
- The application to different stem expositions allows a spatial resolution of stem radius fluctuations.
- Compatibility to most logging systems and easy to power with a stable 5V DC supply.
- Easy to mount.
- Minor disturbance of the tree stem.
- Weatherproof materials.
- Constructed, produced and tested by experts in tree physiology. Made in Switzerland.

Mounting principle

The electronic part of the dendrometer is mounted on a carbon fibre frame which is fixed to the stem by three stainless steel thread rods implanted into the inactive heartwood. A sensing rod is pressed slightly against the tree stem by a spring. The combination of weatherproof materials and a solid anchorage in the stem make it possible to precisely detect changes in the stem radius with a resolution of less than 1 μm .

Mounting instruction

1. Hold the dendrometer against the stem and mark the three spots to drill. Use the outermost rod holes in the carbon frame whenever possible. Ensure that the sensing rod is pointing towards the centre of the stem.
2. Drill holes approximately 5-8 cm into the stem (drill diameter 4 mm). Ensure that the direction of the drill holes is kept horizontal.
3. Put the cap nuts on the thread rods and screw the thread rods into the drill holes previously prepared.
4. Clear the spot on the bark on which the sensor head is placed from rough, dead parts of bark. Use a knife, a chisel or sandpaper but never cut into the living part of the bark.
5. Remove the cap nuts and mount a screw nut followed by a washer on each thread rod.
6. Mount the dendrometer on the thread rods and adjust the distance to the stem with the screw nuts.
7. Fix the dendrometer with a second washer and a screw nut.
8. Connect the **brown** wire to a stabilised +5V DC power supply, the **yellow** wire to GND, and the **white** wire to the data logger.

Maintenance

Put a droplet of WD-40 on the moveable sensor rod twice a year.



Point Dendrometer ZN12-T-2WP

The **ZN12-T-2WP** is a T-shaped dendrometer with two sensors to be mounted on tree stems >7 cm in diameter. The two sensors allow measuring stem radius changes over bark and on the xylem in parallel. The frame is made out of one piece of carbon fibre (CFK) and is consequently combined with stainless steel elements (rods and nuts). The two electronic displacement-sensors (linear motion potentiometer) are of the same type as for the ZN11-T-WP and the former ZB06.

Size of carbon fibre frame: 190 x 92 x 8 mm

Weight (with thread rods): 180 g

Frame: T-shaped carbon fibre frame, 3 stainless steel thread rods, 6 screw nuts, 6 washers, and 3 cap nuts.

Displacement transducer: Two weather-proof but not sealed potentiometer for measuring in a μm resolution. The hub of the moving rod is 2 cm.



Power supply: 5V DC.

Output: 0-5V DC, single ended measurement.

Voltage-Sensitivity: 1 mV = 4.0 μm

Temperature-Sensitivity: < -0.28 $\mu\text{m } ^\circ\text{C}^{-1}$

What is detected?

Diurnal stem radius fluctuations are mainly influenced by changes of the thickness of living tissues of the bark (mainly phloem cells). However, also the xylem undergoes size changes. The radial size changes depend on water tensions inside the stem and have an influence on the hydration status of the bark. While water is withdrawn from the bark through transpiration during the daytime, at night the tissue is replenished. As a result of this cycle, the diameter decreases during the day and increases at night. Over a period of weeks and months, this diurnal rhythm is altered by growth. New layers of xylem cells irreversibly increase the radius, particularly during wet periods in the growing season. In winter, ice formations in the wood induce strong decreases of the stem radius.

Advantages in comparison to other products

- No disturbances by deformations of the dead outermost layer of the bark, induced by temperature and air-humidity (a general argument in favour of point dendrometers and against band dendrometers).
- Materials and electronic parts insensitive to temperature allow for more accurate measurements.
- The spot of measurement is not influenced by the thread rods because it is neither in the vertical nor in the horizontal line of the anchor points.
- The application to different stem expositions allows a spatial resolution of stem radius fluctuations.
- Compatibility to most logging systems and easy to power with a stable 5V DC supply.
- Easy to mount.
- Minor disturbance of the tree stem.
- Weatherproof materials.
- Constructed, produced and tested by experts in tree physiology. Made in Switzerland.

Mounting principle

The two electronic parts of the dendrometer are mounted on a carbon fibre frame which is fixed to the stem by three stainless steel thread rods implanted into the inactive heartwood. Two sensing rods are pressed slightly against the tree stem by a spring. The combination of weatherproof materials and a solid anchorage in the stem make it possible to precisely detect changes in the stem radius with a resolution of less than 1 μm with an accurate logging system.

Mounting instruction

1. Hold the dendrometer against the stem and mark the three spots to drill. Use the outermost rod holes in the carbon frame whenever possible. Ensure that the sensing rod is pointing towards the centre of the stem.
2. Drill holes approximately 5-8 cm into the stem (drill diameter 4 mm). Ensure that the direction of the drill holes is kept horizontal.
3. Put the cap nuts on the thread rods and screw the thread rods into the drill holes previously prepared.
4. Clear the spot on the stem from rough, dead parts of bark on which the first sensor head is placed. Use a knife, a chisel or sandpaper but never cut into the living part of the bark.
5. Cut with a knife a window of about 1x1 cm in size into the bark. Remove bark and cambium tissue and place the second sensor head on the xylem.
6. Remove the cap nuts and mount a screw nut followed by a washer on each thread rod.
7. Mount the dendrometer on the thread rods and adjust the distance to the stem with the screw nuts.
8. Fix the dendrometer with a second washer and a screw nut.
9. Connect the **red** wire to a stabilised +5V DC power supply, the **black** wire to GND, and the **white** wire to the data logger.



Point Dendrometer ZN11-T-IP

The **ZN11-T-IP** consists of a sealed electronic displacement transducer on a carbon fibre (CFK) frame. The design of the sensor closely follows the one of the ZN11-T-WP. Mounting elements are of stainless steel (rods and nuts). The sensor is designed to be applied under very wet conditions.

Size of carbon fibre frame: 190 x 92 x 8 mm

Weight (without thread rods): < 200 g

Frame: T-shaped carbon fibre frame, 3 stainless steel thread rods, 6 screw nuts, 6 washers, and 3 cap nuts.

Displacement transducer: Sealed potentiometer (IP54) for measuring in a μm resolution. Hub of the moving rod is 2 cm. Weather-proof plug on sensor.

Power supply: 5V DC.

Output: 0-5V DC, single ended measurement.

Voltage-Sensitivity: 1 mV = 4.0 μm



What is detected?

Diurnal stem radius fluctuations are mainly influenced by changes of the thickness of living tissues of the bark (mainly phloem cells). The thickness changes depend on the hydration status of the bark. While water is withdrawn from the bark through transpiration during the daytime, at night the tissue is replenished. As a result of this cycle, the diameter decreases during the day and increases at night. Over a period of weeks and months, this diurnal rhythm is altered by growth. New layers of xylem cells irreversibly increase the radius, particularly during wet periods in the growing season. An additional but smaller contribution comes from tensions within the wood and the growth and death of the phloem cells. In winter, ice formations in the wood induce strong decreases of the stem radius.

Advantages in comparison to other products

- No disturbances by deformations of the dead outermost layer of the bark, induced by temperature and air-humidity (a general argument in favour of point dendrometers and against band dendrometers).
- Materials and electronic parts insensitive to temperature allow for more accurate measurements.
- The spot of measurement is not influenced by the thread

rods because it is neither in the vertical nor in the horizontal line of the anchor points.

- The application to different stem expositions allows a spatial resolution of stem radius fluctuations.
- Compatibility to most logging systems and easy to power with a stable 5V DC supply.
- Easy to mount.
- Minor disturbance of the tree stem.
- Very robust and weather-proof materials, sealed electronic displacement transducer, weather-roof plug.
- Constructed, produced and tested by experts in tree physiology. Made in Switzerland.

Mounting principle

The electronic part of the dendrometer is mounted on a carbon fibre frame which is fixed to the stem by three stainless steel thread rods implanted into the inactive heartwood. A sensing rod is pressed slightly against the tree stem by a spring. The combination of weatherproof materials and a solid anchorage in the stem make it possible to precisely detect changes in the stem radius with a resolution of less than 1 μm .

Mounting instruction

1. Hold the dendrometer against the stem and mark the three spots to drill. Use the outermost rod holes in the carbon frame whenever possible. Ensure that the sensing rod is pointing towards the centre of the stem.
2. Drill holes approximately 5-8 cm into the stem (drill diameter 4 mm). Ensure that the direction of the drill holes is kept horizontal.
3. Put the cap nuts on the thread rods and screw the thread rods into the drill holes previously prepared.
4. Clear the spot on the bark on which the sensor head is placed from rough, dead parts of bark. Use a knife, a chisel or sandpaper but never cut into the living part of the bark.
5. Remove the cap nuts and mount a screw nut followed by a washer on each thread rod.
6. Mount the dendrometer on the thread rods and adjust the distance to the stem with the screw nuts.
7. Fix the dendrometer with a second washer and a screw nut.
8. Connect the **red** wire to a stabilised +5V DC power supply, the **black** wire to GND, and the **white** wire to the data logger.

Maintenance

Put a droplet of WD-40 on the moveable sensor rod twice a year.



Point Dendrometer ZN12-T-2IP

The **ZN12-T-2IP** consists of two sealed electronic displacement transducers on a carbon fibre (CFK) frame. Mounting elements are of stainless steel (rods and nuts). The dendrometer is designed to be applied under very wet conditions and enables to measure stem radius changes over bark and on xylem in parallel.

Size of carbon fibre frame: 190 x 92 x 8 mm

Weight (without thread rods): < 200 g

Frame: T-shaped carbon fibre frame, 3 stainless steel thread rods, 6 screw nuts, 6 washers, and 3 cap nuts.

Displacement transducer: Two sealed potentiometer (IP54) for measuring in a μm resolution. Hub of the moving rod is 2 cm. Weather-proof plug on sensor.

Power supply: 5V DC.

Output: 0-5V DC, single ended measurement.

Voltage-Sensitivity: 1 mV = 4.0 μm



What is detected?

Diurnal stem radius fluctuations are mainly influenced by changes of the thickness of living tissues of the bark (mainly phloem cells). The thickness changes depend on the hydration status of the bark. While water is withdrawn from the bark through transpiration during the daytime, at night the tissue is replenished. As a result of this cycle, the diameter decreases during the day and increases at night. Over a period of weeks and months, this diurnal rhythm is altered by growth. New layers of xylem cells irreversibly increase the radius, particularly during wet periods in the growing season. An additional but smaller contribution comes from tensions within the wood and the growth and death of the phloem cells. In winter, ice formations in the wood induce strong decreases of the stem radius.

Advantages in comparison to other products

- No disturbances by deformations of the dead outermost layer of the bark, induced by temperature and air-humidity (a general argument in favour of point dendrometers and against band dendrometers).



- Materials and electronic parts insensitive to temperature allow for more accurate measurements.
- The spot of measurement is not influenced by the thread rods because it is neither in the vertical nor in the horizontal line of the anchor points.
- The application to different stem expositions allows a spatial resolution of stem radius fluctuations.
- Compatibility to most logging systems and easy to power with a stable 5V DC supply.
- Easy to mount.
- Minor disturbance of the tree stem.
- Very robust and weather-proof materials, sealed electronic displacement transducer, weather-proof plug.
- Constructed, produced and tested by experts in tree physiology. Swiss Made.

Mounting principle

The electronic parts of the dendrometer are mounted on a carbon fibre frame which is fixed to the stem by three stainless steel thread rods implanted into the inactive heartwood. A sensing rod is pressed slightly against the tree stem by a spring. The combination of weatherproof materials and a solid anchorage in the stem make it possible to precisely detect changes in the stem radius with a resolution of less than 1 μm .

Mounting instruction

1. Hold the dendrometer against the stem and mark the three spots to drill. Use the outermost rod holes in the carbon frame whenever possible. Ensure that the sensing rod is pointing towards the centre of the stem.
2. Drill holes approximately 5-8 cm into the stem (drill diameter 4 mm). Ensure that the direction of the drill holes is kept horizontal.
3. Put the cap nuts on the thread rods and screw the thread rods into the drill holes previously prepared.
4. Clear the spot on the bark on which the sensor head is placed from rough, dead parts of bark. Use a knife, a chisel or sandpaper but never cut into the living part of the bark.
5. Remove the cap nuts and mount a screw nut followed by a washer on each thread rod.
6. Mount the dendrometer on the thread rods and adjust the distance to the stem with the screw nuts.
7. Fix the dendrometer with a second washer and a screw nut.
8. After mounting the dendrometer, press the sensing rod back into its housing and let it slip back onto the tree surface. This procedure makes sure that the sensing rod gets not jammed.
9. Connect the **brown** wire to a stabilised +5V DC power supply, the **yellow** wire to GND, and the **white** wire to the data logger.

Maintenance

Put a droplet of WD-40 on the moveable sensor rod twice a year.

Point Dendrometer ZN11-O_x-WP

The **ZN11-O-WP** is a point dendrometer with a ring-shaped frame offered in different sizes to optimally fit small stems. On request, the frame can be equipped with up to three sensors.

Diameter frames: 100 mm (**ZN11-O₁₀₀**), 80 mm (**ZN11-O₈₀**), 60 mm (**ZN11-O₆₀**).

Weight: 120-160 g

Components: Ring-shaped carbon fibre frame (CFK), 3 stainless steel screws, 1 electronic displacement sensor (linear motion potentiometer).

Power supply: 5V DC (stabilised).

Output: 0-5V DC, single ended measurement.



Voltage-Sensitivity: 1 mV = 4.0 μm

Temperature-Sensitivity: < 0.5 $\mu\text{m } ^\circ\text{C}^{-1}$

What is detected?

Diurnal stem radius fluctuations are mainly influenced by changes of the thickness of living tissues of the bark (mainly phloem cells). The thickness changes depend on the hydration status of the bark. While water is withdrawn from the bark through transpiration during the daytime, at night the tissue is replenished. As a result of this cycle, the diameter decreases during the day and increases at night. Over a period of weeks and months, this diurnal rhythm is altered by growth. New layers of xylem cells irreversibly increase the

radius, particularly during wet periods in the growing season. An additional but smaller contribution comes from tensions within the wood and the growth and death of the phloem cells. In winter, ice formations in the wood induce strong decreases of the stem radius.

Advantages in comparison to other products

- No disturbances by deformations of the dead outermost layer of the bark, induced by temperature and air-humidity (a general argument in favour of point dendrometers and against band dendrometers).
- Minimal sensitivity to temperature and other weather impacts due to the circular construction of the frame and the weatherproof electronic displacement-sensor allow for more accurate measurements.
- The spot of measurement is not influenced by the mounting screws.
- Compatibility to most logging systems and easy to power with a stable 5V DC supply.
- Easy to mount. The only tool needed is a screw driver.
- Minor disturbance of the tree stem.
- Weatherproof materials.
- Constructed, produced and tested by experts in tree physiology. Made in Switzerland.

Mounting principle

The electronic part of the ZN11-O_x-WP is mounted on a circular carbon fibre frame (CFK) which is fixed to the stem by three screws. A sensing rod is pressed slightly against the tree stem by a spring. The combination of weatherproof materials and a solid three-point anchorage on the stem surface make it possible to precisely detect changes in the stem radius with a resolution of less than 1 μm .

Mounting instruction

1. Dismantle the two screws on one side of the frame.
2. Enclose the stem, branch or root section with the frame and torque the two screws of the frame.
3. Clear the spot on the bark on which the sensor head is placed from rough, dead parts of bark. Use a knife, a chisel or sandpaper but never cut into the living part of the bark.
4. Adjust the distance between the potentiometer and the stem. Place the sensing rod on the bark. Ensure that the sensing rod is pointing towards the centre of the stem.
5. Place the three screws tightly on the bark surface (no drill wholes necessary). Make sure the frame is not moving anymore after fixing the screws.
6. Connect the **red** wire to a stabilised +5V DC power supply, the **black** wire to GND, and the **white** wire to the data logger.

Maintenance

Put a droplet of WD-40 on the moveable sensor rod twice a year.



Point Dendrometer ZN12-O_x-2WP

The **ZN12-O-2WP** is a point dendrometer with a ring-shaped frame offered in different sizes to optimally fit small stems. The frame is equipped with two displacement transducers allowing to measure stem radius changes over bark and on xylem in parallel.

Diameter frames: 100 mm (ZN12-O₁₀₀), 80 mm (ZN12-O₈₀), 60 mm (ZN12-O₆₀).

Weight: <150 g

Components: Ring-shaped carbon fibre frame (CFK), 3 stainless steel screws, 2 electronic displacement sensor (linear motion potentiometer).

Power supply: 5V DC (stabilised).

Output: 0-5V DC, single ended measurement.

Voltage-Sensitivity: 1 mV = 4.0 µm

Temperature-Sensitivity: < 0.5 µm °C⁻¹



What is detected?

Diurnal stem radius fluctuations are mainly influenced by changes of the thickness of living tissues of the bark (mainly phloem cells). The thickness changes depend on the hydration status of the bark. While water is withdrawn from the bark through transpiration during the daytime, at night the tissue is replenished. As a result of this cycle, the diameter decreases during the day and increases at night. Over a period of weeks and months, this diurnal rhythm is altered by growth. New layers of xylem cells irreversibly increase the radius, particularly during wet periods in the growing season. An additional but smaller contribution comes from tensions

within the wood and the growth and death of the phloem cells. In winter, ice formations in the wood induce strong decreases of the stem radius.

Advantages in comparison to other products

- No disturbances by deformations of the dead outermost layer of the bark, induced by temperature and air-humidity (a general argument in favour of point dendrometers and against band dendrometers).
- Minimal sensitivity to temperature and other weather impacts due to the circular construction of the frame and the weatherproof electronic displacement-sensor allow for more accurate measurements.
- The spot of measurement is not influenced by the mounting screws.
- Compatibility to most logging systems and easy to power with a stable 5V DC supply.
- Easy to mount. The only tool needed is a screw driver.
- Minor disturbance of the tree stem.
- Weatherproof materials.
- Constructed, produced and tested by experts in tree physiology. Made in Switzerland.

Mounting principle

The electronic parts of the ZN12-O_x-2WP are mounted on a circular carbon fibre frame (CFK) which is fixed to the stem by three screws. Two sensing rods are pressed slightly against the tree stem by a spring. The combination of weatherproof materials and a solid three-point anchorage on the stem surface make it possible to precisely detect changes in the stem radius with a resolution of less than 1 µm.

Mounting instruction

1. Dismantle the two screws on one side of the frame.
2. Enclose the stem, branch or root section with the frame and torque the two screws of the frame.
3. Clear the spot on the bark on which the sensor head is placed from rough, dead parts of bark. Use a knife, a chisel or sandpaper.
4. Adjust the distance between the potentiometer and the stem. Place the sensing rod on the bark. Ensure that the sensing rod is pointing towards the centre of the stem.
5. Place the three screws tightly on the bark surface (no drill whistles necessary). Make sure the frame is not moving anymore after fixing the screws.
6. Connect the **brown** wire to a stabilised +5V DC power supply, the **yellow** wire to GND, and the **white** wire to the data logger.

Maintenance

Put a droplet of WD-40 on the moveable sensor rod twice a year.



References *stem radius fluctuations ...*

... with natkon-dendrometers

- Dawes M.A., Zweifel R., Dawes N., Rixen Ch., and Hagedorn F. 2014. CO₂ enrichment alters diurnal stem radius fluctuations of 36-yr-old *Larix decidua* growing at the alpine tree line. *New Phytologist*. 202 (4): 1237-48.
- Zweifel R., Drew DM, Schweingruber FH, Downes GM. 2014. Xylem as the main origin of stem radius changes in Eucalyptus. *Functional Plant Biology*. 41 (5): 520-534.
- Ehrenberger W, Rüger S, Fitzke R, Vollenweider P, Günthardt-Goerg M, Kuster T, Zimmermann U, Arend M. 2012. Concomitant dendrometer and leaf patch pressure probe measurements reveal the effect of microclimate and soil moisture on diurnal stem water and leaf turgor variations in young oak trees. *Functional Plant Biology*. 39: 297-305.
- Etzold S, Ruehr NK, Zweifel R, Dobbertin M, Zingg A, Pluess P, Häsler R, Eugster W, Buchmann N. 2011. The carbon balance of two contrasting mountain forest ecosystems in Switzerland: Similar annual trends, but seasonal differences. *Ecosystems*. 14(8): 1289-1309.
- De Schepper V, Steppe K. 2010. Development and verification of a water and sugar transport model using measured stem diameter variations. *Journal of Experimental Botany*. 61(8): 2083-2099.
- Zweifel R, Eugster W, Etzold S, Dobbertin M, Buchmann N, Häsler R. 2010. Link between continuous stem radius changes and net ecosystem productivity of a subalpine Norway spruce forest in the Swiss Alps. *New Phytologist*. 187: 819-830.
- Zweifel, R. & Zeugin, F. 2008. Ultrasonic acoustic emissions in drought-stressed trees - more than signals from cavitation? *New Phytologist*. 179: 1070-1079.
- Zweifel, R., L. Zimmermann and D.M. Newbery. 2005. Modeling tree water deficit from microclimate: an approach to quantifying drought stress. *Tree Physiology*. 25, 147-156.
- Zweifel R, Steppe K, Sterck FJ. 2007. Stomatal regulation by microclimate and tree water relations: interpreting ecophysiological field data with a hydraulic plant model. *Journal of Experimental Botany*. 58 (8): 2113-2131.
- Zweifel R, Zeugin F, Zimmermann L, Newbery DM. 2006. Intra-annual radial growth and water relations of trees – implications towards a growth mechanism. *Journal of Experimental Botany*. 57 (6):1445-1459.

... with other dendrometer types and related methods

- Sevanto S, Holttä T, Holbrook NM. 2011. Effects of the hydraulic coupling between xylem and phloem on diurnal phloem diameter variation. *Plant Cell and Environment*. 34(4): 690-703.
- Drew D.M., Downes G.M., Grzeskowiak V. & Naidoo T. 2009. Differences in daily stem size variation and growth in two hybrid eucalypt clones. *Trees-Structure and Function*. 23, 585-595.
- Drew D.M. & Downes G.M. 2009. The use of precision dendrometers in research on daily stem size and wood property variation: A review. *Dendrochronologia*. 27, 159-U157.
- Sevanto S, Nikinmaa E, Riikonen A, Daley M, Pettijohn JC, Mikkelsen TN, Phillips N, Holbrook NM. 2008. Linking xylem diameter variations with sap flow measurements. *Plant and Soil* 305(1-2): 77-90.
- Daudet, F.A., T. Ameglio, H. Cochard, O. Archilla and A. Lacointe. 2005. Experimental analysis of the role of water and carbon in tree stem diameter variations. *Journal of Experimental Botany*. 56, 135-144.
- Perämäki, M., E. Nikinmaa, S. Sevanto, H. Ilvesniemi, E. Siivola, P. Hari and T. Vesala 2001. Tree stem diameter variations and transpiration in Scots pine: an analysis using a dynamic sap flow model. *Tree Physiology*. 21, 889-897.
- Sevanto, S., T. Vesala, M. Perämäki and E. Nikinmaa 2002. Time lags for xylem and stem diameter variations in a Scots pine tree. *Plant Cell and Environment*. 25, 1071-1077.
- Saveyn A, Steppe K, Lemeur R. 2007. Drought and the diurnal patterns of stem CO₂ efflux and xylem CO₂ concentration in young oak (*Quercus robur*). *Tree Physiology*. 27(3): 365-374.
- Steppe, K., D.J.W. De Pauw, R. Lemeur and P.A. Vanrolleghem 2006. A mathematical model linking tree sap flow dynamics to daily stem diameter fluctuations and radial stem growth. *Tree Physiology*. 26, 257-273.
- Zweifel, R. and R. Häsler. 2000. Frost-induced reversible shrinkage of bark of mature, subalpine conifers. *Agricultural and Forest Meteorology*. 102, 213-222.
- Zweifel, R. and R. Häsler. 2001. Dynamics of water storage in mature, subalpine *Picea abies*: temporal and spatial patterns of change in stem radius. *Tree Physiology*. 21, 561-569.
- Zweifel, R., H. Item and R. Häsler 2000. Stem radius changes and their relation to stored water in stems of young Norway spruce trees. *Trees*. 15, 50-57.
- Zweifel, R., H. Item and R. Häsler 2001. Link between diurnal stem radius changes and tree water relations. *Tree Physiology*. 21, 869-877.
- Hsiao, T.C. and E. Acevedo. 1974. Plant responses to water deficits, water-use efficiency, and drought resistance. *Agricultural Meteorology*. 14, 59-84.

