

PIEZORESISTIVE PRESSURE TRANSMITTERS FOR INDUSTRIAL APPLICATIONS / COMPACT VERSION

These piezoresistive silicon pressure transmitters are produced on the new KELLER automatic brazing lines, making possible the mass production of high quality pressure transmitters at low cost. This new technology allows the crevice-free construction of the pressure port without using seals or O-rings. In the brass sensor line (Series 21 MC), a steel insert and a nickel diaphragm is brazed into a brass housing. In the steel sensor line (Series 21 SC), all parts are of stainless steel (AISI 316 L). The header with the silicon pressure sensor and glass lead-through pins is welded to the steel insert underneath the oil filling. The tiny chip-on-board amplifier (weight \approx 1 gram) with the KELLER-specific "PROGRES" circuit is mounted directly on the glass feed-through pins. It is then encapsulated in silicone compound for humidity and vibration protection.

Note: The cable version of the transmitters has exceptionally high RFI protection.

SERIES 21 MC / 21 SC

SPECIFICATIONS


PA Sealed Gauge (zero at 1 bar abs.) Overpressure	Pressure Ranges (FS)					
	5	10	20	50	100	200
	10	20	40	100	200	300
	2-Wire		3-Wire		4-Wire	
Output (ratiometric@Excitation)	4...20 mA		0,5...4,5 V@5 V		0...100 mV@10 V	
Excitation	8...28 V		4,75...5,25 V		5...15 V	
	SERIES 21 SC			SERIES 21 MC		
Total Accuracy at RT	$\pm 0,5\%$ FS			$\pm 1\%$ FS		
T.C. of Zero	$\pm 0,03\%$ FS / °C			$\pm 0,04\%$ FS / °C		
T.C. of Sensitivity	$\pm 0,03\%$ / °C			$\pm 0,04\%$ / °C		
Long Term Stability, typ.	< 0,2% FS			< 0,5% FS		
Operating Temperature	-25...+80 °C					
Compensated Temperature Range	0...+50 °C					
Protection	IP 65					
Vibration	20 g (5...2000 Hz, max. amplitude \pm 3 mm), according to IEC 68-2-6					
Shock	20 g (11 ms)					
CE-Conformity	EN 50081-1, EN 50082-2					
Insulation	> 100 M Ω / 500 V					
Pressure Port	G 1/4" male, Eolastic®-seal					
Cable / Connector	2 m / mPm (option DIN 43650)					
Weight (Connector Version)	\approx 60 g					

Series 21 MC

Brass Sensor Head, Steel Body

Series 21 SC

Steel Sensor Head, Steel Body

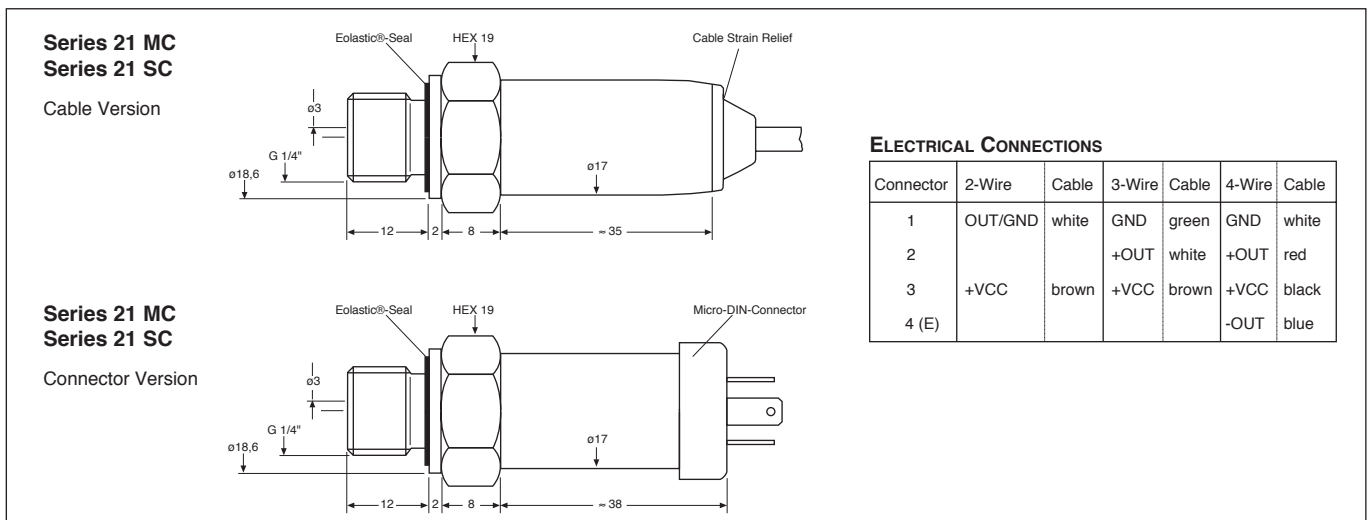

ELECTRICAL CONNECTIONS

Connector	2-Wire	Cable	3-Wire	Cable	4-Wire	Cable
1	OUT/GND	white	GND	green	GND	white
2			+OUT	white	+OUT	red
3	+VCC	brown	+VCC	brown	+VCC	black
4 (E)					-OUT	blue

Subject to alterations

6/02

KELLER AG für Druckmesstechnik
KELLER Gesellschaft für Druckmesstechnik mbH

St. Gallerstrasse 119
Schwarzwaldstrasse 17

CH-8404 Winterthur
D-79798 Jestetten

Tel. 052 - 235 25 25
Tel. 07745 - 9214 - 0

Fax 052 - 235 25 00
Fax 07745 - 9214 - 50

Companies approved to ISO 9001 / EN 29001

www.keller-druck.com